




TQX.11007 Triple QX Motor Oil 5W-30 SYNPLUS LL III

Dokumentversion: 17.10.2026

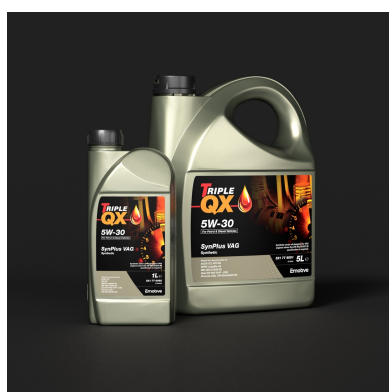

Beschreibung	TRIPLE QX SYNPLUS VAG 5W30 SYNTHETIC is designed for VAG engines where the VW 504.00/ 507.00 specification is required. It is also designed to meet specifications of other OEM's and reaches ACEA and API requirements by balancing excellent fluidity with advanced engine protection, regardless of the driving conditions.			
Spezifikationen	ACEA C3 API SN			
Leistungsniveau	BMW Longlife-04 MB 229.51 / 229.52 Opel OV 040 1547 - D30 Porsche C30 VW 504.00 / 507.00			
Verpackungseinheiten	ART.-NR.	VOLUMEN	ARTIKEL PRO EINHEIT	ARTIKEL PRO PALLETTE
	TQX.521776092	1 L	12	-
	TQX.521776091	5 L	4	-
	TQX.521776095	20 L	1	-
	TQX.521776099	60 L	1	-
	TQX.521771656	199 L	1	-

Standardanalyse

TEST	WERT		METHODE
Dichte bei 15°C	0.856	kg/l	ASTM D4052
Kinematische Viskosität bei 40°C	68.0	mm ² /s	ASTM D445
Kinematische Viskosität bei 100°C	11.7	mm ² /s	ASTM D445
Viskositätsindex	169		ASTM D2270
Flammpunkt COC	230	°C	ASTM D92
Pourpoint	-39	°C	ASTM D6892
Gesamtbasenzahl	8.3	mgKOH/g	ASTM D2896
Sulfatasche	0.7	mass%	ASTM D874

Diese Werte sind typisch für die aktuelle Produktion. Abweichungen dieser Werte können auftreten.