




TQX.11018 Triple QX Motor Oil 5W-30 SYNPLUS DX1

Dokumentversion: 17.10.2026

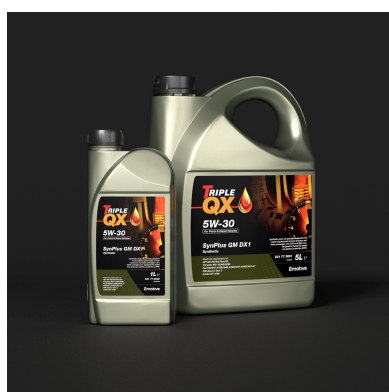

Beschreibung

TRIPLE QX SYNPLUS GM DX1 5W-30 is a fully synthetic lubricant formulated with carefully selected, high quality base oils. It offers exceptional protection against wear and sludge buildup, even under the most demanding driving conditions. Due to its advanced friction-reducing properties, it also contributes to improved fuel economy.

Anwendungshandbuch

Spezifikationen

API SN Plus / SN-RC / SP
ILSAC GF-5 / GF-6A

Leistungsniveau

Chrysler MS-13340 / MS-6395
Ford WSS-M2C945-A / WSS-M2C946-A / WSS-M2C947-A / WSS-M2C961-A1
GM dexos1 Gen 3

Verpackungseinheiten

ART.-NR.	VOLUMEN	ARTIKEL PRO EINHEIT	ARTIKEL PRO PALLETTE
TQX.521773662	1 L	12	-
TQX.521773661	5 L	4	-
TQX.521773665	20 L	1	-
TQX.521773666	199 L	1	-

Standardanalyse

TEST	WERT		METHODE
Dichte	0.848	kg/l	ASTM D4052
Kinematische Viskosität bei 40°C	64.6	mm ² /s	ASTM D445
Kinematische Viskosität bei 100°C	11.1	mm ² /s	ASTM D445
Viskositätsindex	166		ASTM D2270
Flammpunkt	225	°C	ASTM D92
Pourpoint	-38	°C	ASTM D6892
Gesamtbasenzahl	7.4	mgKOH/g	ASTM D2896

Diese Werte sind typisch für die aktuelle Produktion. Abweichungen dieser Werte können auftreten.