




TQX.22002 Triple QX Motor Oil 15W-40 MINERAL UHPD

Dokumentversion: 17.10.2026

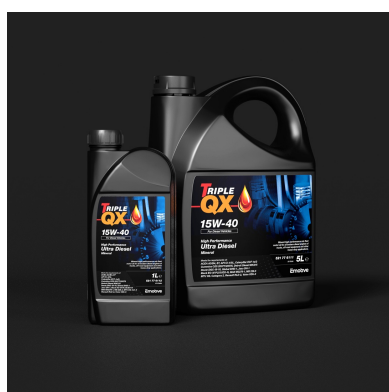

Beschreibung	TQX ULTRA Diesel 15W40 is a high-performance mineral diesel engine oil formulated to deliver reliable performance in a broad range of heavy-duty applications. It is suitable for low-emission engines (Euro II, Euro III and some Euro IV engines).			
Spezifikationen	ACEA A3/B4 / E7 API CI-4 / SL Global DHD-1 JASO DH-1			
Leistungsniveau	Caterpillar ECF-1-a / ECF-2 Cummins CES 20077 / CES 20078 Detroit Diesel 93K215 Deutz DQC III-10 MAN 3275-1 MB 228.3 MTU Oil Category 2 Mack EO-M Plus / EO-N Renault RLD-2 Volvo VDS-3			
Verpackungseinheiten	ART.-NR.	VOLUMEN	ARTIKEL PRO EINHEIT	ARTIKEL PRO PALLETTE
	TQX.521776112	1 L	12	-
	TQX.521776111	5 L	4	-
	TQX.521776115	20 L	1	-
	TQX.521772116	199 L	1	-

Standardanalyse

TEST	WERT		METHODE
Dichte bei 15°C	0.883	kg/l	ASTM D4052
Kinematische Viskosität bei 40°C	99.7	mm ² /s	ASTM D445
Kinematische Viskosität bei 100°C	13.6	mm ² /s	ASTM D445
Viskositätsindex	136		ASTM D2270
Pourpoint	-32	°C	ASTM D6892
Gesamtbasenzahl	9.2	mgKOH/g	ASTM D2896

Diese Werte sind typisch für die aktuelle Produktion. Abweichungen dieser Werte können auftreten.