




## TQX.22003 Triple QX Motor Oil 10W-40 SYNPLUS HD

Dokumentversion: 17.10.2026

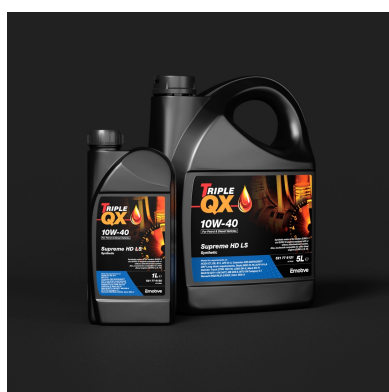

|                    |                                                                                                                                                                                                                                                                        |  |  |  |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| Beschreibung       | TQX SUPREME HD LS 10W40 synthetic based engine oil meets the specifications of a broad range of different heavy-duty engine manufacturers. Its corrosion and deposit reducing properties keep the engine optimally protected regardless of the operational conditions. |  |  |  |
| Anwendungshandbuch | This versatile lubricant meets the specifications of a broad range of different modern EURO V and EURO VI engines equipped with or without aftertreatment system. Furthermore, it can be used within different older diesel engines (EURO II, III, IV).                |  |  |  |
| Spezifikationen    | ACEA E11 / E7 / E8<br>API CI-4<br>JASO DH-2                                                                                                                                                                                                                            |  |  |  |
| Leistungsniveau    | Cummins CES 20076 / CES 20077<br>DAF Long drain requirements<br>Daimler Truck DTFR 15C110<br>Deutz DQC III-10 LA / DQC IV-10 LA<br>MAN M 3271-1 / M 3477<br>MB 226.9<br>MTU Oil Category 3.1<br>Mack EO-N<br>Renault RGD / RLD-2 / RXD<br>Volvo VDS-3                  |  |  |  |

| Verpackungseinheiten | ART.-NR.      | VOLUMEN | ARTIKEL PRO EINHEIT | ARTIKEL PRO PALLETTE |
|----------------------|---------------|---------|---------------------|----------------------|
|                      | TQX.521776122 | 1 L     | 12                  | -                    |
|                      | TQX.521776121 | 5 L     | 4                   | -                    |
|                      | TQX.521776125 | 20 L    | 1                   | -                    |
|                      | TQX.521772096 | 199 L   | 1                   | -                    |

## Standardanalyse

| TEST                              | WERT  |                    | METHODE       |
|-----------------------------------|-------|--------------------|---------------|
| Dichte bei 15°C                   | 0.860 | kg/l               | ASTM<br>D4052 |
| Kinematische Viskosität bei 40°C  | 87.7  | mm <sup>2</sup> /s | ASTM D445     |
| Kinematische Viskosität bei 100°C | 13.2  | mm <sup>2</sup> /s | ASTM D445     |
| Viskositätsindex                  | 151   |                    | ASTM<br>D2270 |
| Pourpoint                         | -33   | °C                 | ASTM<br>D6892 |
| Gesamtbasenzahl                   | 10.2  | mgKOH/g            | ASTM<br>D2896 |

Diese Werte sind typisch für die aktuelle Produktion. Abweichungen dieser Werte können auftreten.