




TQX.22003 Triple QX Motor Oil 10W-40 SYNPLUS HD

Document version: Oct 18, 2026

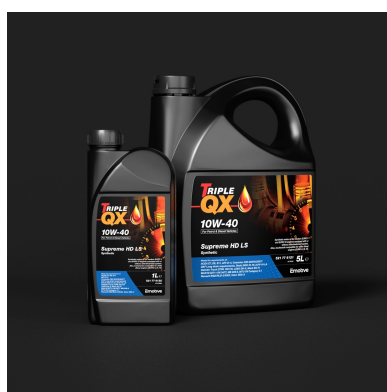

Description	TQX SUPREME HD LS 10W40 synthetic based engine oil meets the specifications of a broad range of different heavy-duty engine manufacturers. Its corrosion and deposit reducing properties keep the engine optimally protected regardless of the operational conditions.			
Application manual	This versatile lubricant meets the specifications of a broad range of different modern EURO V and EURO VI engines equipped with or without aftertreatment system. Furthermore, it can be used within different older diesel engines (EURO II, III, IV).			
According to the specifications of	ACEA E11 / E7 / E8 API CI-4 Cummins CES 20076 / CES 20077 DAF Long drain requirements Daimler Truck DTFR 15C110 Deutz DQC III-10 LA / DQC IV-10 LA JASO DH-2 MAN M 3271-1 / M 3477 MB 226.9 MTU Oil Category 3.1 Mack EO-N Renault RGD / RLD-2 / RXD Volvo VDS-3			
Packaging units	ART. NR.	VOLUME	ITEMS PER UNIT	ITEMS PER PALLET
	TQX.521776122	1 L	12	-
	TQX.521776121	5 L	4	-
	TQX.521776125	20 L	1	-
	TQX.521772096	199 L	1	-

Standard analyses

TEST	VALUE		METHOD
Density at 15°C	0.860	kg/l	ASTM D4052
Kinematic Viscosity at 40°C	87.7	mm2/s	ASTM D445
Kinematic Viscosity at 100°C	13.2	mm2/s	ASTM D445
Viscosity Index	151		ASTM D2270
Pourpoint	-33	°C	ASTM D6892
Total Base Number	10.2	mgKOH/g	ASTM D2896

These characteristics are typical of current production. Variations in these characteristics may occur.