




TQX.22003 Triple QX Motor Oil 10W-40 SYNPLUS HD

Documentversie: 18 okt. 2026

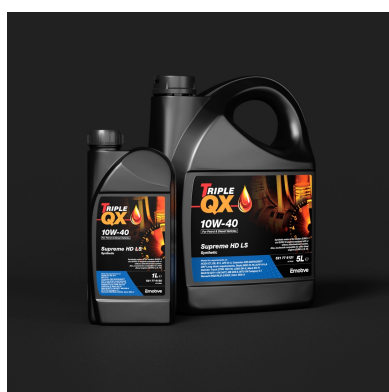

Omschrijving	TQX SUPREME HD LS 10W40 synthetic based engine oil meets the specifications of a broad range of different heavy-duty engine manufacturers. Its corrosion and deposit reducing properties keep the engine optimally protected regardless of the operational conditions.			
Toepassingshandleiding	This versatile lubricant meets the specifications of a broad range of different modern EURO V and EURO VI engines equipped with or without aftertreatment system. Furthermore, it can be used within different older diesel engines (EURO II, III, IV).			
Volgens de specificaties van	ACEA E11 / E7 / E8 API CI-4 Cummins CES 20076 / CES 20077 DAF Long drain requirements Daimler Truck DTFR 15C110 Deutz DQC III-10 LA / DQC IV-10 LA JASO DH-2 MAN M 3271-1 / M 3477 MB 226.9 MTU Oil Category 3.1 Mack EO-N Renault RGD / RLD-2 / RXD Volvo VDS-3			

Verpakkingseenheden	ART. NR.	VOLUME	AANTAL PER STUK	AANTAL PER PALLET
	TQX.521776122	1 L	12	-
	TQX.521776121	5 L	4	-
	TQX.521776125	20 L	1	-
	TQX.521772096	199 L	1	-

Standaardanalyses

TEST	WAARDE		METHODE
Dichtheid bij 15°C	0.860	kg/l	ASTM D4052
Kinematische viscositeit bij 40°C	87.7	mm2/s	ASTM D445
Kinematische viscositeit bij 100°C	13.2	mm2/s	ASTM D445
Viscositeitsindex	151		ASTM D2270
Vloeipunt	-33	°C	ASTM D6892
Totaal Base-getal	10.2	mgKOH/g	ASTM D2896

Deze waarden zijn typerend voor de huidige productie. Er kan variatie in de waarden optreden.