




TQX.30002 Triple QX Gear Oil 75W-90 SYNPLUS TDL

Version du document: 17 oct. 2026

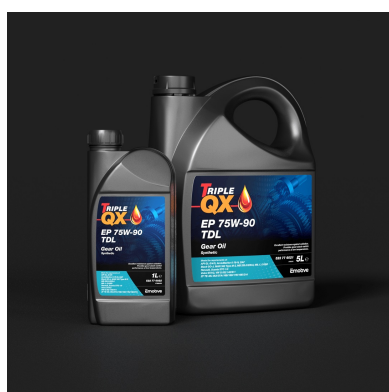

Description Excellent resistance against oxidation. Provides good clutch-switch performance at low temperatures.

Selon les spécifications de API GL-3 / GL-4 / GL-5
Arvin Meritor 0-76-N
DAF
MAN 342 Type M-2
MB 235.0 / 235.8
MIL-L-2105D
Mack GO-J
Renault
Scania STO 1:0
VW G 052 145 / 052 911
Volvo 97312
ZF TE-ML 05A / 07A / 16B / 16D / 17B / 19B / 21A

Unités d'emballage	ART. N°	VOLUME	ARTICLES PAR UNITÉ	ARTICLES PAR PALETTE
	TQX.522776022	1 L	12	-
	TQX.522776021	5 L	4	-
	TQX.522776025	20 L	1	-

Analyses standard

TEST	VALEUR		METHOD
Densité à 15 °Celsius	0.869	kg/l	ASTM D4052
Viscosité cinématique à 40 °Celsius	78	mm2/s	ASTM D445
Viscosité cinématique à 100 °Celsius	14.8	mm2/s	ASTM D445
Indice de viscosité	200		
Point d'écoulement	-42	°C	ASTM D6892
Viscosité Brookfield à -40 °Celsius	100000	mPa.s	ASTM D2983

These characteristics are typical of current production. Variations in these characteristics may occur.