




TQX.30002 Triple QX Gear Oil 75W-90 SYNPLUS TDL

Documentversie: 18 okt. 2026

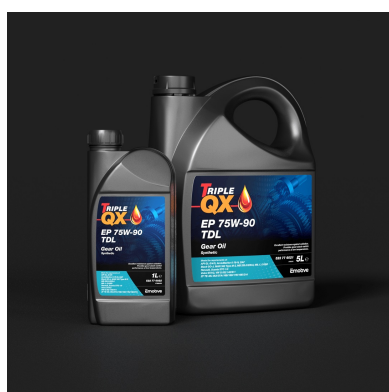

Omschrijving Excellent resistance against oxidation. Provides good clutch-switch performance at low temperatures.

Volgens de specificaties van API GL-3 / GL-4 / GL-5
Arvin Meritor 0-76-N
DAF
MAN 342 Type M-2
MB 235.0 / 235.8
MIL-L-2105D
Mack GO-J
Renault
Scania STO 1:0
VW G 052 145 / 052 911
Volvo 97312
ZF TE-ML 05A / 07A / 16B / 16D / 17B / 19B / 21A

Verpakkingseenheden	ART. NR.	VOLUME	AANTAL PER STUK	AANTAL PER PALLET
	TQX.522776022	1 L	12	-
	TQX.522776021	5 L	4	-
	TQX.522776025	20 L	1	-

Standaardanalyses	TEST	WAARDE		METHODE
	Dichtheid bij 15°C	0.869	kg/l	ASTM D4052
	Kinematische viscositeit bij 40°C	78	mm ² /s	ASTM D445
	Kinematische viscositeit bij 100°C	14.8	mm ² /s	ASTM D445
	Viscositeitsindex	200		
	Vloeipunt	-42	°C	ASTM D6892
	Brookfield-viscositeit bij -40°C	100000	mPa.s	ASTM D2983