




TQX.11018 Triple QX Motor Oil 5W-30 SYNPLUS DX1

Document version: Oct 18, 2026

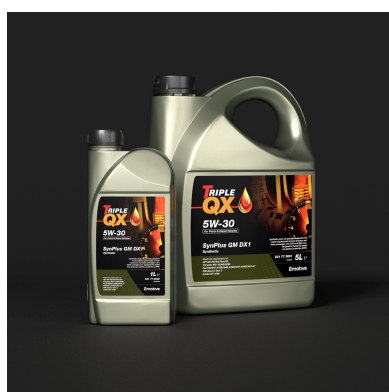

Description

TRIPLE QX SYNPLUS GM DX1 5W-30 is a fully synthetic lubricant formulated with carefully selected, high quality base oils. It offers exceptional protection against wear and sludge buildup, even under the most demanding driving conditions. Due to its advanced friction-reducing properties, it also contributes to improved fuel economy.

Application manual

According to the specifications of

API SN Plus / SN-RC / SP
Chrysler MS-13340 / MS-6395
Ford WSS-M2C945-A / WSS-M2C946-A / WSS-M2C947-A / WSS-M2C961-A1
GM dexos1 Gen 3
ILSAC GF-5 / GF-6A

Packaging units

ART. NR.	VOLUME	ITEMS PER UNIT	ITEMS PER PALLET
TQX.521773662	1 L	12	-
TQX.521773661	5 L	4	-
TQX.521773665	20 L	1	-
TQX.521773666	199 L	1	-

Standard analyses

TEST	VALUE		METHOD
Density	0.848	kg/l	ASTM D4052
Kinematic Viscosity at 40°C	64.6	mm ² /s	ASTM D445
Kinematic Viscosity at 100°C	11.1	mm ² /s	ASTM D445
Viscosity Index	166		ASTM D2270
Flashpoint	225	°C	ASTM D92
Pourpoint	-38	°C	ASTM D6892
Total Base Number	7.4	mgKOH/g	ASTM D2896